


## Dimensioning

### Adapter 60° cone end (ISO/DIS 8434-6)/dimensions

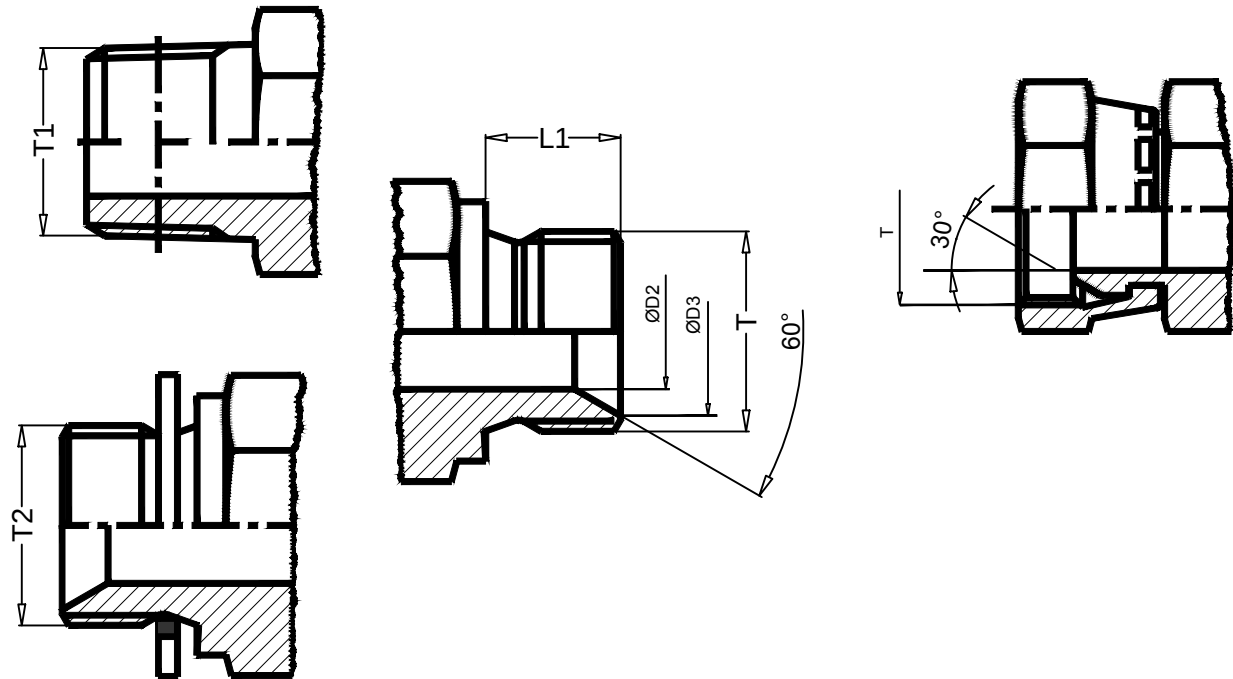

| size | T<br>BSPP | D2<br>mm | D3<br>mm | L1mm | T1                |                   | T2<br>BSPP                      |
|------|-----------|----------|----------|------|-------------------|-------------------|---------------------------------|
|      |           |          |          |      | BSPT              | NPT(F)            |                                 |
| 02   | G 1/8 A   | 3.5      | 7.5      | 8    | 1/8<br>1/4        | 1/8<br>1/4        | 1/8                             |
| 04   | G 1/4 A   | 4.7      | 10.4     | 11   | 1/4<br>1/8<br>3/8 | 1/4<br>1/8<br>3/8 | 1/4<br>1/8                      |
| 06   | G 3/8 A   | 7.9      | 14.0     | 12   | 3/8<br>1/4<br>1/2 | 3/8<br>1/4<br>1/2 | 3/8<br>1/4                      |
| 08   | G 1/2 A   | 11.1     | 17.5     | 14   | 1/2<br>3/8        | 1/2<br>3/8<br>3/4 | 1/2<br>1/4<br>3/8               |
| 10   | G 5/8 A   | 14.3     | 19.3     | 16   | 1/2<br>3/4        |                   | 1/2<br>5/8                      |
| 12   | G 3/4 A   | 16.7     | 22.9     | 16   | 3/4<br>1/2<br>1   | 3/4<br>1/2<br>1   | 3/4<br>1/4<br>3/8<br>1/2<br>5/8 |
| 16   | G 1 A     | 22.2     | 28.7     | 19   | 1<br>3/4          | 1<br>3/4          | 1<br>1/2<br>5/8<br>3/4          |
| 20   | G 1 1/4 A | 28.6     | 36.8     | 22   | 1 1/4             |                   | 3/4<br>1<br>1 1/4               |
| 24   | G 1 1/2 A | 33.3     | 42.7     | 22   | 1 1/2             |                   | 1<br>1 1/4<br>1 1/2             |
| 32   | G 2 A     | 46.0     | 54.6     | 25   |                   |                   | 1 1/2<br>2                      |