


24° Swivel Connector (DIN 3865/DIN EN ISO 8434-1)/ dimension

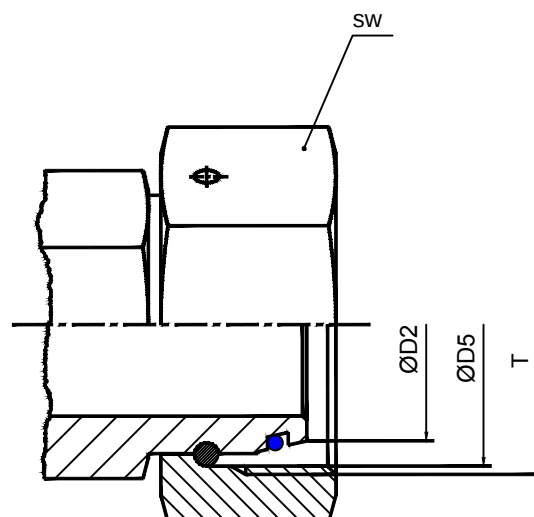

Tube O.D. Size	T	ØD2 mm	ØD5 mm Thread core diameter	SW mm
06 - L	M 12X1.5	5.5	10.38	14
08 - L	M 14X1.5	7.5	12.38	17
10 - L	M 16X1.5	9.7	14.38	19
12 - L	M 18X1.5	11.7	16.38	22
15 - L	M 22X1.5	14.7	20.38	27
18 - L	M 26X1.5	17.7	24.38	32
22 - L	M 30X2	21.7	27.84	36
28 - L	M 36X2	27.7	33.84	41
35 - L	M 45X2	34.5	42.84	50
42 - L	M 52X2	41.5	49.84	60
06 - S	M 14X1.5	5.5	12.38	17
08 - S	M 16X1.5	7.5	14.38	19
10 - S	M 18X1.5	9.7	16.38	22
12 - S	M 20X1.5	11.7	18.38	24
14 - S	M 22X1.5	13.5	20.38	27
16 - S	M 24X1.5	15.5	22.38	30
20 - S	M 30X2	19.5	29.84	36
25 - S	M 36X2	24.5	33.84	46
30 - S	M 42X2	29.5	39.84	50
38 - S	M 52X2	37.5	49.84	60