




**HYDROMATIK**  
connections par excellence

## Metric Bite Type Fittings

### SHP-M-OR - SOCKET HEAD PLUG WITH 'O' Ring Sealing

SHP-M-OR | METRIC Threads M

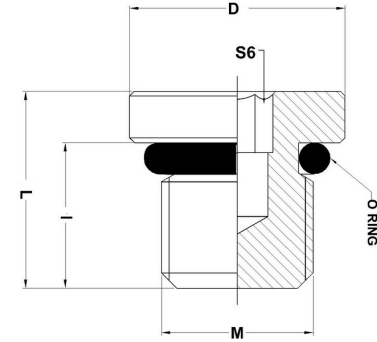

Part No.	M	D	L	i	S6
SHP M10 OR	M10 X 1.0	13	14	10	5
SHP M12 OR	M12 X 1.5	17	16.5	11.5	6
SHP M14 OR	M14 X 1.5	19	16.5	11.5	6
SHP M16 OR	M16 X 1.5	21	18	13	8
SHP M18 OR	M18 X 1.5	23	19.5	14.5	8
SHP M22 OR	M22 X 1.5	27	20.5	15.5	10
SHP M26 OR	M26 X 1.5	31	21	16	12
SHP M27 OR	M27 X 2.0	32	24	19	12
SHP M33 OR	M33 X 2.0	38	25.5	19	17
SHP M42 OR	M42 X 2.0	48	26	19.5	22

Temp range without pressure reductions

for 'O' Ring sealing of NBR (buna N- Std) -35Â° to +100Â° C, FOR FPM

(Viton - ON request) -25Â° TO +120Â° C.