


Dimensioning

O -Lok end (ISO ISO 8434-3/SAE J1453)/ dimensions

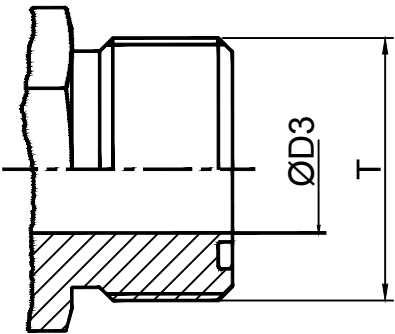

| Size | Tube O.D.  |          | T<br>UN/UNF | T<br>Major thread Ø mm | Ø D3 mm |
|------|------------|----------|-------------|------------------------|---------|
|      | inch       | mm       |             |                        |         |
| 4    | 1/4        | 6        | 9/16-18     | 14.0                   | 5.0     |
| 6    | 5/16 . 3/8 | 8, 10    | 1 1/16-16   | 17.0                   | 6.5     |
| 8    | 1/2        | 12       | 1 3/16-16   | 20.5                   | 9.5     |
| 10   | 5/8        | 14,15,16 | 1-14        | 25.0                   | 12.5    |
| 12   | 3/4        | 18,20    | 1 3/16-12   | 30.0                   | 15.5    |
| 16   | 7/8.1      | 22,25    | 1 7/16-12   | 36.0                   | 20.5    |
| 20   | 1 1/4      | 28,30.32 | 1 11/16-12  | 42.5                   | 26.5    |
| 24   | 1 1/2      | 35,38    | 2-12        | 50.5                   | 32.0    |
| 32   | 2          | 50       | 2 1/2-12    | 63.0                   | 45.0    |

All dimensions shown are nominal for identification only.  
Small deviations may be found between SAE J1453 or ISO 8434-3 on bore sizes.